

# THERMAL AGING OF POWER DISTRIBUTION TRANSFORMERS OPERATING UNDER NONLINEAR AND BALANCED LOAD CONDITIONS

Emil CAZACU, Valentin IONITA, Lucian PETRESCU

Department of Electrotechnics, Faculty of Electrical Engineering, University Politehnica of Bucharest, Splaiul Independentei 313, 060042 Bucharest, Romania

emil.cazacu@upb.ro, valentin.ionita@upb.ro, lucian.petrescu@upb.ro

DOI: 10.15598/aece.v16i1.2701

**Abstract.** *The flow of harmonic current encountered in nowadays electrical installations causes numerous undesirable issues to the power grid. The most detrimental consequence is the premature aging or even failure of the in-service power distribution transformers from industrial facilities (originally designed to cope with the linear loads). Accordingly, the paper quantitatively examines the major thermal operating parameters of these transformers and predicts their lifetime expectancy under a certain harmonic load spectrum. The developed computation principle is based on the international standard recommendations and only demands the load current harmonic content (measured with a power quality analyzer) and the transformer rated data. The study is also carried out on a 250 kVA oil-type three-phase power distribution transformer from a pumping station.*

## Keywords

*Harmonics, thermal aging, transformers.*

## 1. Introduction

The main culprits of the poor power quality in terms of distorted currents encountered in the modern electric installations are the nonlinear loads; electric equipment (industrial or domestic) with built-in electronic components that enable their control and energy efficient operation [1], [2], [3], [4] and [5]. On the other hand, due to the generated high order harmonic currents, they cause numerous instantaneous and long terms detrimental consequences on the installation components: circuit-breakers untimely tripping, overheating, mechanical stress, abnormal vibrations and acoustic

noise of the electric machinery. The power distribution transformers from the in-service industrial plants were originally designed to serve linear loads and their lifespan was predicted to a few decades (with regular maintenance). The nowadays increased prevalence of the nonlinear loads additionally stresses the supply transformers by rising their intrinsic losses and consequently causing the machines premature aging or even failure [6], [7], [8], [9], [10], [11], [12] and [13]. The paper quantitatively examines the aging parameters of a power distribution transformer operating under balance and nonlinear load conditions (the typical industrial load state) [14], [15] and [16]. The transformer advanced thermal models [6] and [8] are often inefficient for in-situ investigation due to the numerous constructive and material required data. Thus, with the transformer rated data and the current harmonic spectrum, at the machine low-voltage side, the main electric and thermal operating quantities are continuously evaluated. Regarding also the international standards recommendations [17] and [18], the following transformer parameters are computed for different load factors: hot-spot temperature, the insulation relative aging acceleration factor, the percentage loss of life and lifetime expectancy. The harmonic load currents aging impact on the transformers is exemplified on a 250 kVA oil-type three-phase power distribution transformer that feeds an industrial facility (pumping station).

## 2. Transformer Aging Due to the Harmonic Currents

The aging process of any electrical equipment from an installation occurs, during its operation, mainly due to the deterioration of the equipment insulation materials.

This complex process is influenced by numerous factors such as the mechanical stress or chemical aggression, moisture or oxygen content and, above all, the working temperature of the appliance [19], [20] and [21]. The latter is the most dominant parameter that ultimately determines the device lifespan. Since, in most appliances, the temperature is not uniformly distributed, the part that is operating at the highest temperature will commonly experience the greatest deterioration. Hence, in aging studies, it is usual to consider the aging effects produced by the highest (hot-spot) temperature [18].

## 2.1. Transformer Hot-Spot Temperature Evaluation

The expected lifetime of a distribution transformer is also very responsive to the machine hot-spot temperature. The harmonic currents of the supplied nonlinear loads cause supplementary losses within the transformer and may determine hot-spot temperatures that exceed the rated (reference) value. Therefore, a rapid degradation of the transformer insulation materials is expected followed by the reduction of transformer initial designed lifetime. For liquid-filled power distribution transformers, the windings hot-spot temperature  $\theta_H$  is a function of ambient temperature  $\theta_A$ , the oil temperature rise in respect to ambient temperature  $\theta_{TO}$ , and the conductor hot-spot temperature rise relative to oil temperature  $\theta_g$  [17]:

$$\theta_H = \theta_A + \theta_{TO} + \theta_g. \quad (1)$$

The last two terms involved in the above relation could be evaluated considering the machine rated data and losses distribution inside the transformer (ohmic losses  $P_{DC}$ , load losses  $P_{LL}$ , eddy current losses  $P_{EC}$ , other stray losses  $P_{OSL}$  and no load  $P_{NL}$  losses) [17]:

$$\begin{aligned} \theta_{TO} &= \theta_{TO-R} \left( \frac{P_{LL} + P_{NL}}{P_{LL-R} + P_{NL}} \right)^{0.8}, \\ \theta_g &= \theta_{g-R} \left( \frac{P_{DC} + P_{EC}}{P_{DC-R} + P_{EC-R}} \right)^{0.8}, \end{aligned} \quad (2)$$

where  $\theta_{TO-R}$  is the rated oil temperature rise with respect to the ambient temperature,  $\theta_{g-R}$  is the rated conductor temperature rise relative to oil temperature and  $P_{DC-R}$ ,  $P_{LL-R}$ ,  $P_{EC-R}$  are the rated ohmic, load and eddy current losses respectively.

The operating transformer losses could be expressed in term of the load factor  $\beta$  (computed as the root mean square current  $I$  relative to transformer rated sinusoidal current  $I_{R2}$  at the low-voltage winding) and two power quality parameters that accounts the load current harmonic spectrum: harmonic loss factor ( $F_{HL}$

or  $K$ ) and harmonic loss factor for other stray losses ( $F_{HL-STR}$ ) [13], [15], [16] and [17]:

$$\begin{cases} P_{LL} = P_{DC} + P_{EC} + P_{OSL}, \\ P_{DC} = \beta^2 P_{DC-R}, \\ P_{EC} = \beta^2 P_{EC-R} F_{HL}, \\ P_{OSL} = \beta^2 P_{OSL-R} F_{HL-STR}, \end{cases}$$

with:

$$\begin{aligned} F_{HL} &= \frac{1}{I^2} \sum_{k=0}^N k^2 I_k^2, \\ F_{HL-STR} &= \frac{1}{I^2} \sum_{k=0}^N k^{0.8} I_k^2, \\ \beta &= \frac{S}{S_R} \cong \frac{I}{I_{R2}}, \quad I^2 = \sum_{k=0}^N I_k^2, \end{aligned} \quad (3)$$

where  $I_k$  is the effective value of the  $k$  current harmonic order,  $N$  is the highest accounted harmonic order (in our computations  $N = 50$ ),  $S$  represents the apparent power and  $S_R$  is the transformer rated power under normal (sinusoidal) condition.

The rated winding eddy current losses  $P_{EC-R}$  and rated other stray losses  $P_{OSL-R}$  are conservatively estimated in accordance with the international standard recommendations [17]:

$$\begin{aligned} P_{EC-R} &= 0.33 (P_{LL-R} - P_{DC-R}), \\ P_{OSL-R} &= 0.67 (P_{LL-R} - P_{DC-R}). \end{aligned} \quad (4)$$

Supplementary, the transformer rated ohmic losses  $P_{DC-R}$  are computed on the basis of primary and secondary rated currents ( $I_{R1}$ ,  $I_{R2}$ ) and the windings DC ohmic resistances indicated by the manufacturer ( $R_1$ ,  $R_2$ ), respectively:

$$P_{DC-R} = 3(R_1 I_{R1}^2 + R_2 I_{R2}^2). \quad (5)$$

Since in the actual industrial power distribution systems the supply voltages waveforms are balanced and sinusoidal, the transformer no-load losses  $P_{NL}$  are invariable in respect to the current harmonic spectrum.

## 2.2. The Transformer Maximum Load Factor and Operating Capacity

In order to derive the admissible load factor  $\beta_{\max}$  and its corresponding maximum permissible nonsinusoidal current  $I_{MPC}$  (effective value), one has to constrict the transformer operating hot-spot temperature  $\theta_H$  (under any harmonic current conditions) to equal its initial reference value  $\theta_{Href}$  (assumed for pure linear rated

load).

$$\theta_A + \theta_{TO-R} \left( \frac{P_{LL\max} + P_{NL}}{P_{LL-R} + P_{NL}} \right)^{0.8} + \theta_{g-R} \left( \frac{P_{DC\max} + P_{EC\max}}{P_{DC-R} + P_{EC-R}} \right)^{0.8} = \theta_{Href},$$

with:

$$\begin{cases} P_{LL\max} = P_{DC\max} + P_{EC\max} + P_{OSL\max}, \\ P_{DC\max} = \beta_{\max}^2 P_{DC-R}, \\ P_{EC\max} = \beta_{\max}^2 P_{EC-R} F_{HL}, \\ P_{OSL\max} = \beta_{\max}^2 P_{OSL-R} F_{HL-STR}. \end{cases} \quad (6)$$

The equation above is numerically solved (regarding the ambient temperature), and consequently, the transformer Reduction in Apparent Power Rating (RAPR) and its maximal operating capacity  $S_M$  are estimated:

$$\begin{aligned} RAPR &= \frac{I_{R2} - I_{MPC}}{I_{R2}} \cdot 100 \% = \\ &= [1 - \beta_{\max}] \cdot 100 \%, \\ S_M &= \beta_{\max} \cdot S_R, \\ \beta_{\max} &= \frac{I_{MPC}}{I_{R2}}. \end{aligned} \quad (7)$$

To consider the most unfavorable (worst case) thermal operating conditions of the transformer, the maximum of rated windings eddy current losses is assumed. This can be appreciated, in per unites system relative to ohmic rated losses, according to [17]:

$$P_{EC-R}(p.u.)_{\max} = \frac{2.4 P_{EC-R}}{3 R_2 I_{R2}^2}. \quad (8)$$

### 2.3. Transformer Lifetime Estimation

The power distribution transformer lifespan is directly associated with the windings conductors' insulation life. Consequently, the actual standards [18] provide the rate at which the transformer insulation aging is accelerated compared with the aging rate at a reference hot-spot temperature  $\theta_{Href}$  by a factor called aging acceleration factor  $F_{AA}$ . Its expression mainly depends on the transformer operating hot-spot temperature  $\theta_H$ :

$$F_{AA} = \exp \left( \frac{B}{\theta_{Href} + 273} - \frac{B}{\theta_H + 273} \right), \quad (9)$$

where  $B$  is an insulation type material constant [18]. It is also important to reveal that if the relative aging acceleration factor has less than unity values, the transformers initial lifetime expectancy Normal Insulation Life ( $NIL$ ) is preserved.

Considering the above-mentioned assumptions, the percent loss of life (% $LOL$ ) of the transformer insula-

tion can be evaluated [18], [19], [20] and [21]:

$$\%LOL = \frac{F_{AA}}{NIL} t \cdot 100. \quad (10)$$

where  $t$  is a certain period (indicated in years).

Practically, the machine lifetime is regarded as its insulation lifespan. Hence, the transformer Per Unit Life  $Life(pu)$  (relative to its normal insulation lifetime), and the machine Remaining Life  $RL$  can be expressed in terms of the operating transformer hot-spot temperature  $\theta_H$  and the aging acceleration factor  $F_{AA}$ , respectively [18]:

$$\begin{aligned} Life(pu) &= A \exp \left( \frac{B}{\theta_H + 273} \right), \\ RL &= \frac{NIL}{F_{AA}} = Life(pu) NIL, \end{aligned} \quad (11)$$


where  $A$  is a material constant, estimated also based on the Normal Insulation Lifetime ( $NIL$ ). The constant  $B$  is the same as the one already indicated in [9].

For the power distribution transformers found in most of the in-service examined electric installations, the normal insulation life is considered 20 years. According to the manufactures indications, these transformers have an average winding temperature rise relative to ambient temperature of 55 °C and common (not thermally upgraded) conductor insulation type [18]. This corresponds to a reference (rated) hot spot temperature of  $\theta_{Href} = 95$  °C and material constants values:  $A = 2 \cdot 10^{-18}$  and  $B = 15,000$  [18], [19], [20] and [21].

The operating parameters computation procedure presented here allows an in-situ, fast and less intrusive investigation method for the numerous, still working, power distribution transformers subjected to distorted currents from various industrial installations.

### 2.4. Transformer Thermal Aging Parameters Prediction-Case Study


The transformer thermal aging evaluation principle is illustrated on an oil-type 250 kVA power distribution unit that supplies nonlinear and balanced loads from an industrial pump facility - Fig. 1. The transformer rated characteristics, provided by the manufacturer, are illustrated in the Appendix. The main electric quantities of the machine are continuously measured and monitored at the transformer secondary part (low-voltage side) with a professional power quality analyzer [22]. The latter also transfers all the acquired data to a portable computer, which due to a developed software package (elaborated in accordance with the principle exposed

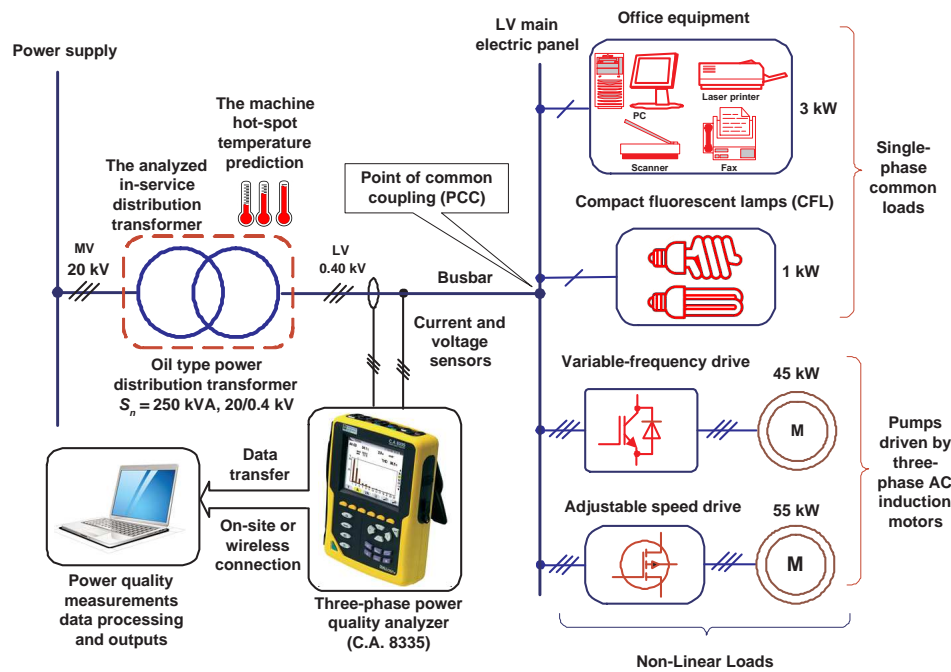


**Fig. 1:** The investigated three-phase power distribution transformer supplying single and three-phase nonlinear loads of an industrial pump facility.

in the previous section), predicts the operating transformer hot-spot temperature and its corresponding remaining life. Additionally, all the losses inside the machine, their division and the derating parameters are also determined.

For the investigated nonlinear load, the most relevant power quality parameters were constantly measured and acquired. Thus, the transformer currents waveforms and their harmonic spectrum are shown in Fig. 3 and Fig. 4, respectively. Figure 5 reveals the currents absolute values at the fundamental frequency, the phase displacement of the line voltages relative to the currents and the unbalance level. The phase currents root mean square and their harmonic parameters values are indicated in Fig. 5, while Fig. 6 and Fig. 7 show the load (active, reactive and apparent) powers and power factor. All the computed operating parameters (electrical and thermal) for the investigated transformer are presented in Tab. 1 for two different load factors. The first one corresponds to the measured transformer harmonic state:  $\beta_1 = 0.377$  and the second one:  $\beta_2 = 0.754$  assumes a double load with the same harmonic current spectrum. Supplementary, for comparison reasons, the parameters for the rated (pure sinusoidal state)  $\beta = 1$  are also indicated in Tab. 1. Consequently, the first load factor generates within the machine the hot-spot temperature  $\theta_{H1} = 66.238^\circ\text{C}$  that is below its reference value ( $\theta_{Href} = 95^\circ\text{C}$ ) and determines an ageing acceleration factor  $F_{AA1} = 0.0315$ . This subunit value indicates that the transformer preserves its normal insulation life ( $NIL = 20$  years) - the percent loss of life value per year is neglected.

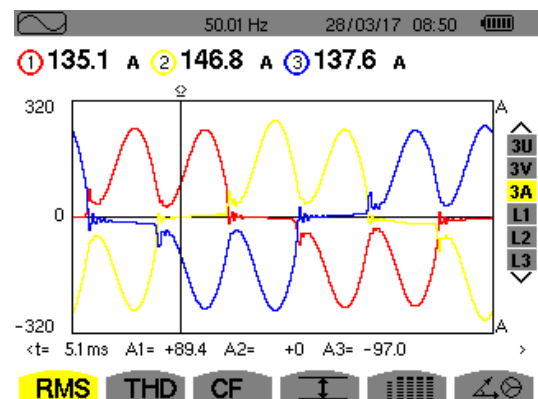



**Fig. 2:** The transformer currents waveforms and their root mean square values.

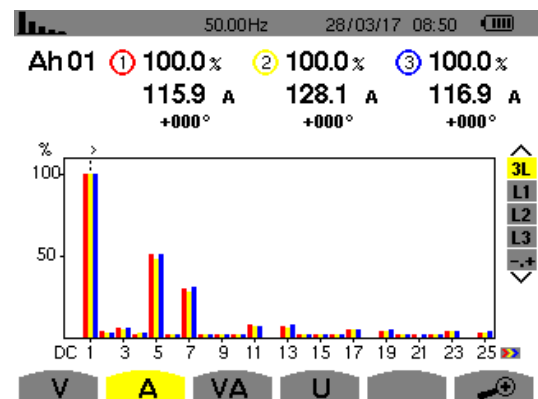

**Fig. 3:** The phase currents harmonic spectrum.

**Tab. 1:** Electrical and thermal operating parameters of the investigated transformer for different load factors.

A) Temperatures within the transformer and aging parameters			
Thermal aging parameters of the transformer	Rated linear load	Various nonlinear loads ,(distorted currents), Load factor $\beta = I/I_{2R}$	
	$\beta = 1$	$\beta_1 = 0.377$	$\beta_2 = 0.377$
The top oil temperature rise in respect to ambient temperature $\theta_{TO}$ (°C)	55	27.560	65.437
The conductor hot spot temperature rise relative to oil temperature $\theta_g$ (°C)	5	3.677	11.147
The transformer hottest spot winding temperature $\theta_H$ (°C)	95	66.238	111.585
Aging acceleration factor $F_{AA}$	1	0.0315	5.799
The percent Loss of Life (% <i>LOL</i> ) pro year	-	-	28.999
Remaining Life $RL$ (years)	20	20	3.474
B) Losses distribution within the transformer			
Type of losses in the transformer (W)	$\beta = 1$	$\beta_1 = 0.377$	$\beta_2 = 0.754$
No load $P_{NL}$	650	650	650
DC Ohmic $P_{DC}$	2166.666	308.679	1234.717
Eddy current $P_{EC}$	357.5	608.209	2432.838
Other stray $P_{OSL}$	725.833	191.241	764.9677
Total $P_T$	3900	1758.130	5082.523
The nonlinear load harmonic loss factor $F_{HL}$ or $K$		11.9416	
The nonlinear load harmonic loss factor for other stray losses $F_{HL-STR}$		1.849	
C) Transformer maximal acceptable operating parameters			
Maximum load factor		$\beta_{max} = 0.646$	
Maximum permissible current		$I_{MCP} = 233.250$ (A)	
Maximal operating capacity		$S_M = 161.600$ (kVA)	
Reduction in apparent power rating		$RAPR = 35.359$ (%)	

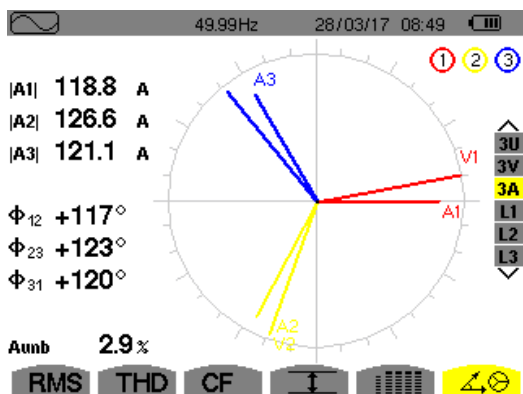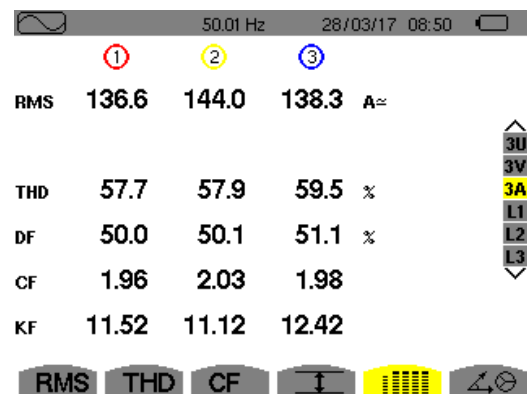**Fig. 4:** The currents absolute values at the fundamental frequency, the phase displacement of the line voltages relative to the currents and the unbalance level.**Fig. 5:** The phase currents root mean square and their harmonic parameters values.

The transformer behaves completely differently when the load factor is doubled with the same currents harmonic content. Hence, for  $\beta_2 = 0.754$ , the main thermal operating parameters significantly exceeds their rated values: the hot-spot temperature be-

comes  $\theta_{H2} = 111.585$   $^{\circ}\text{C}$  and the new aging accelerating factor reaches up to  $F_{AA2} = 5.799$ . Therefore, the transformer remaining life suddenly drops down to only  $RL_2 = 3.474$  years (the percent loss of life year value is 28.99 %). All the above computations were performed considering the rated temperatures of the

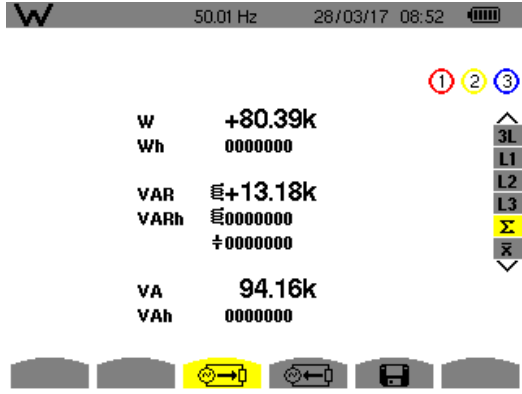


Fig. 6: The active, reactive and apparent powers.

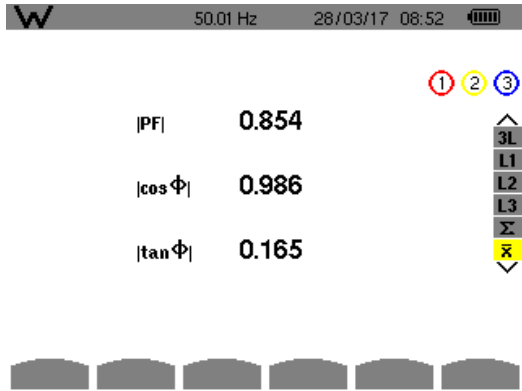


Fig. 7: The load power factor.


transformer shown in the Appendix and ambient temperature  $\theta_A = 30^\circ\text{C}$ .

The developed program also manages to adequately predict and visualize the transformer operating parameters variation with different alterations of the non-linear load features. Thus, the effect of load factor changes on the hot-spot temperature, aging acceleration factor and the machine remaining life are represented in Fig. 8(a), Fig. 8(b) (in semilogarithmic representation) and Fig. 8(c) respectively. The maximal permissible load factor  $\beta_{\max} = 0.646$  and its corresponding (rated) operating parameters:  $\theta_{H_{ref}} = 95^\circ\text{C}$ ,  $F_{AA} = 1$  and  $RL = NIL$  are also depicted in Fig. 8.


One can notice that for the measured load current harmonic spectrum, the transformer could maintain the initial insulation lifetime ( $NIL = 20$  years) only up to almost half of the rated capacity ( $\beta_{\max} = 0.646$ ).

### 3. Remarks and Conclusions


The electrical and thermal operating parameters of the actual in-service power distribution transformers that supply nonlinear loads were predicted and reviewed. Accordingly, the main transformer aging indi-

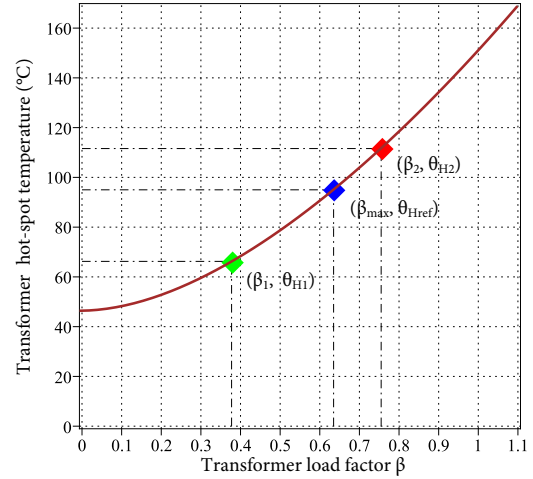

(a) The hot-spot temperature.

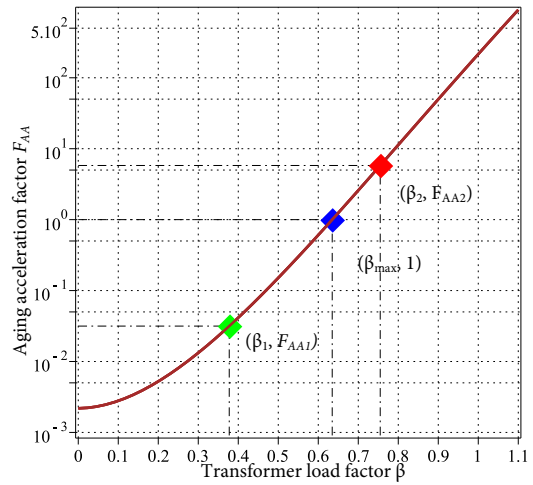

(b) Aging acceleration factor in semilogarithmic representation.

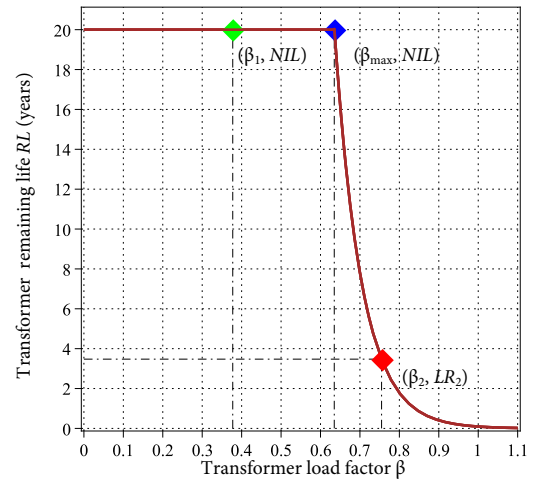

(c) The transformer remaining life.

Fig. 8: Transformer aging parameters dependency of the load factor: (a) the hot-spot temperature, (b) aging acceleration factor in semilogarithmic representation and (c) the transformer remaining life.



cators (hot-spot temperature, aging acceleration factor etc.) were continuously computed in accordance with the measured current harmonic load spectrum and the transformer rated data. The proposed computation principle is based on the international standards recommendations and constraints the machine operating hot-spot temperature to be under the rated (reference) value, indicated by the manufacturer. Thus, all the derating parameters (maximum permissible current, the reduction in apparent power rating etc.) are also evaluated along with their dependency with the load factor variation. This technique is to be easily implemented in any general-purpose computing software and could be further used as a low-cost and flexible on-site maintenance instrument of the transformer (especially as the power quality data could be nowadays wirelessly transferred to a mobile computation unit). To preserve the transformer rated lifespan, some additional on-site proactive maintenance measures are strongly advised. Hence, thermographic inspection and vibration investigation on the main transformer constructive part may be easily performed with the adequate equipment (portable infrared camera and vibration analyzer). The presented transformer aging computation procedure was systematically tested on many units with different rated powers from various industrial facilities. This could avoid the machine overloading by signaling the abnormal non-electric parameters. The presented hot-spot computation principle could be improved in terms of its accuracy and applicability in at least three major directions: better evaluation of the operating losses (by using high precision numerical method), the consideration of the load unbalances (especially useful in domestic installations with numerous single-phase loads) and finally by taking into account also the voltage distortions (occurring when high non-linear loads are supplied by systems with low short-circuit power).

## Acknowledgment

This work was supported by a grant of the Romanian National Authority for Scientific Research and Innovation, CNCS/CCCDI-UEFISCDI, project no. PN-III-P2.-2.1-PED-2016-0451, within PNCDI III.

## References

- [1] MCBEE, K. D. Transformer Aging due to High Penetrations of PV, EV Charging, and Energy Storage Applications. In: *Ninth Annual IEEE Green Technologies Conference (GreenTech)*. Denver: IEEE, 2017, pp. 163–170. ISBN 978-1-5090-4535-8. DOI: 10.1109/GreenTech.2017.30.
- [2] BANGARRAJU, J., V. RAJAGOPAL and A. J. LAXMI. Power Quality Enhancement Using Power Balance Theory Based DSTATCOM. *Advances in Electrical and Electronic Engineering*. 2016, vol. 14, no. 1, pp. 1–10. ISSN 1804-3119. DOI: 10.15598/aece.v14i1.1342.
- [3] MOHSENZADEH, A., M. H. KAPOURCHALI, C. PANG and V. ARAVINTHAN. Impact of smart home management strategies on expected lifetime of transformer. In: *IEEE/PES Transmission and Distribution Conference and Exposition (T&D)*. Dallas: IEEE, 2016, pp. 1–5. ISBN 978-1-5090-2157-4. DOI: 10.1109/TDC.2016.7519945.
- [4] GONG, Q., S. MIDLAM-MOHLER, V. MARANO and G. RIZZONI. Study of PEV Charging on Residential Distribution Transformer Life. *IEEE Transactions on Smart Grid*. 2011, vol. 3, no. 1, pp. 404–412. ISSN 1949-3061. DOI: 10.1109/TSG.2011.2163650.
- [5] TAHER, M. A., S. KAMEL and Z. M. ALI. K-Factor and transformer losses calculations under harmonics. In: *Eighteenth International Middle East Power Systems Conference (MEPCON)*. Cairo: IEEE, 2016, pp. 753–758. ISBN 978-1-4673-9063-7. DOI: 10.1109/MEPCON.2016.7836978.
- [6] ELMOUDI, A., M. LEHTONEN and H. NORDMAN. Effect of harmonics on transformers loss of life. In: *Conference Record of the 2006 IEEE International Symposium on Electrical Insulation*. Toronto: IEEE, 2006, pp. 408–411. ISBN 1-4244-0333-2. DOI: 10.1109/ELINSL.2006.1665344.
- [7] CAZACU, E., L. PETRESCU and V. IONITA. Derating of power distribution transformers serving nonlinear industrial loads. In: *2017 International Conference on Optimization of Electrical and Electronic Equipment (OPTIM) & 2017 Intl Aegean Conference on Electrical Machines and Power Electronics (ACEMP)*. Brasov: IEEE, 2017, pp. 90–95. ISBN 978-1-5090-4489-4. DOI: 10.1109/OPTIM.2017.7974953.
- [8] FAIZ, J., M. GHAZIZADEH and H. ORAEE. Derating of transformers under non-linear load current and non-sinusoidal voltage – an overview. *IET Electric Power Applications*. 2015, vol. 9, iss. 7, pp. 486–495. ISSN 1751-8679. DOI: 10.1049/iet-epa.2014.0377.
- [9] CAZACU, E., L. PETRESCU and V. IONITA. Losses and temperature rise within power transformers subjected to distorted currents. In: *15th International Conference on Electrical Machines, Drives and Power Systems (ELMA)*. Sofia: IEEE,

- 2017, pp. 362–365. ISBN 978-1-5090-6691-9. DOI: 10.1109/ELMA.2017.7955464.
- [10] SINGH, R. and A. SINGH. Aging of distribution transformers due to harmonics. In: *14th International Conference on Harmonics and Quality of Power (ICHQP)*. Bergamo: IEEE, 2010, pp. 1–8. ISBN 978-1-4244-7246-8. DOI: 10.1109/ICHQP.2010.5625347.
- [11] BISHOP, M. T., J. F. BARANOWSKI, D. HEATH and S. J. BENNA. Evaluating harmonic-induced transformer heating. *IEEE Transactions on Power Delivery*. 1996, vol. 11, iss. 1, pp. 305–311. ISSN 1937-4208. DOI: 10.1109/61.484029.
- [12] DEOKAR, S. A. and L. M. WAGHMARE. Impact of power system harmonics on insulation failure of distribution transformer and its remedial measures. In: *3rd International Conference on Electronics Computer Technology (ICECT)*. Kanyakumari: IEEE, 2011, pp. 136–140. ISBN 978-1-4244-8679-3. DOI: 10.1109/ICECTECH.2011.5941817.
- [13] RAD, M. S., M. KAZEROONI, M. J. GHORBANY and H. MOKHTARI. Analysis of the grid harmonics and their impacts on distribution transformers. In: *2012 IEEE Power and Energy Conference at Illinois*. Champaign: IEEE, 2012, pp. 1–5. ISBN 978-1-4577-1682-9. DOI: 10.1109/PECI.2012.6184593.
- [14] CAZACU, E. and L. PETRESCU. On-site derating of in-service power distribution transformers supplying nonlinear loads. *Revue roumaine des sciences techniques Serie Electrotechnique et Energetiqu*. 2014, vol. 59, no. 3, pp. 259–268. ISSN 0035-4066.
- [15] TAHERI, S., H. TAHERI, I. FOFANA, H. HEMMATJOU and A. GHOLAMI. Effect of power system harmonics on transformer loading capability and hot spot temperature. In: *25th IEEE Canadian Conference on Electrical and Computer Engineering (CCECE)*. Montreal: IEEE, 2012, pp. 1–4. ISBN 978-1-4673-1432-9. DOI: 10.1109/CCECE.2012.6334834.
- [16] CAZACU, E. and L. PETRESCU. Derating the three-phase power distribution transformers under nonsinusoidal operating conditions: A case study. In: *16th International Conference on Harmonics and Quality of Power (ICHQP)*. Bucharest: IEEE, 2014, pp. 488–492. ISBN 978-1-4673-6487-4. DOI: 10.1109/ICHQP.2014.6842930.
- [17] IEEE Standard C57.110. *IEEE Recommended Practice for Establishing Liquid-Filled and Dry-Type Power and Distribution Transformer Capability when Supplying Nonsinusoidal Load Currents*. New York: IEEE, 2008.
- [18] IEEE Standard C57.91. *Guide for Loading Mineral-Oil-Immersed Transformers and Step-Voltage Regulators*. New York: IEEE, 2012.
- [19] KOLCUNOVA, I., M. PAVLIK and L. LI-SON. Assessment of Long Thermal Ageing on the Oil-Paper Insulation. *Advances in Electrical and Electronic Engineering*. 2016, vol. 14, no. 5, pp. 506–511. ISSN 1804-3119. DOI: 10.15598/aece.v14i5.1836.
- [20] GODINA, R., E. M. G. RODRIGUES, J. C. O. MATIAS and J. P. S. CATALAO. Effects of loads and other key factors for oil transformer ageing: Sustainability benefits and challenges. *Advances in Electrical and Electronic Engineering*. 2015, vol. 8, iss. 10, pp. 12147–12186. ISSN 1996-1073. DOI: 10.3390/en81012147.
- [21] GOURISETTI, S. N. G., H. KIRKHAM and D. SIVARAMAN. A review of transformer ageing and control strategies. In: *2017 North American Power Symposium (NAPS)*. Morgantown: IEEE, 2017, pp. 1–6. ISBN 978-1-5386-2699-3. DOI: 10.1109/NAPS.2017.8107234.
- [22] C.A 8336 (Three-phase electrical networks analyser: CA Qualistar Plus) In: *Chauvin-Arnoux* [online]. 2010. Available at: <http://www.chauvin-arnoux.com/en/produit/CA8335>.

## About Authors

**Emil CAZACU** was born in Oltenita, Romania, in 1975. He received his M.Sc. and Ph.D. from University Politehnica of Bucharest in 1998 and 2004 respectively. In 1998 he joined the Department of Electrical Engineering, University Politehnica of Bucharest, as a Professor Assistant. In 2015 he became Professor. His research interests include: computation of the electromagnetic fields, electromagnetic levitation, electric circuits and installations, power quality and energy efficiency and novel magnetic materials characterization and modelling.

**Valentin IONITA** was born in Iasi, Romania, in 1964. He received his M.Sc. and Ph.D. from University Politehnica of Bucharest in 1988 and 1994 respectively. In 1990, he joined the Department of Electrical Engineering, University Politehnica of Bucharest, as a Professor Assistant. In 2002 he became Professor. His current research interests include: nano- and micromagnetism, numerical computation of



the electromagnetic field, magnetic material modeling, experimental magnetism, magnetic hysteresis modeling, magnetic losses computation.

**Lucian PETRESCU** was born in Tulcea, Romania, in 1979. He received his M.Sc. and Ph.D. from University Politehnica of Bucharest in 2003 and 2010 respectively. In 2003 he joined the Department of Electrical Engineering, University Politehnica of Bucharest, as a Professor Assistant. In 2017 he became Associated Professor. His research interests include: computation of the electromagnetic fields, magnetic materials characterization and modelling, power quality and energy efficiency.

## Appendix A

### The Analysed Transformer

#### Rated Data

- Rated power capacity  $S_R = 250$  kVA,
- Primary rated voltage  $U_{R1} = 20$  kV,
- Secondary rated voltage  $U_{R1} = 0.4$  kV,
- No load power losses  $P_{NL} = 0.65$  kW,
- Short circuit power losses  $P_{LL-R} = 3.25$  kW,
- No-load current  $i_0 = 2.1$  %,
- Short circuit voltage  $u_{sc} = 6$  %,
- Per-phase DC resistance of primary winding at  $75$  °C:  $R_1 = 10.4$   $\Omega$ ,
- Per-phase DC resistance of secondary winding at  $5$  °C:  $R_2 = 0.00416$   $\Omega$ ,
- Ambient temperature  $\theta_A = 30$  °C,
- Top-oil-rise over ambient temperature under rated conditions  $\theta_{TO-R} = 50$  °C,
- Winding rise over ambient temperature under rated condition  $\theta_{w-R} = 55$  °C,
- Rated (reference) winding hot-spot temperature  $\theta_{Href} = 95$  °C,
- Cooling type: Oil Natural Air Natural (ONAN),
- Vector group: Dyn05.